

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number
WO 02/083556 A2(51) International Patent Classification⁷: **C01B 31/00**(21) International Application Number: **PCT/US02/11617**(22) International Filing Date: **12 April 2002 (12.04.2002)**(25) Filing Language: **English**(26) Publication Language: **English**(30) Priority Data:
60/283,470 12 April 2001 (12.04.2001) US
60/324,066 24 September 2001 (24.09.2001) US


(72) Inventors; and

(75) Inventors/Applicants (for US only): **PRADHAN, Bhabendra, K.** [IN/US]; 1404 Plaza Drive, State College, PA 16802 (US). **HARUTYUNYAN, Avetik** [AM/US]; A-3, 445 Waupelani Drive, State College, PA 16802 (US). **EKLUND, Peter, C.** [US/US]; 310 Meadow Lark Lane, Boalsburg, PA (US). **FUJIWARA, Yoshiya** [JP/JP]; Kabushiki Kaisha Honda Gijutsu Kenkyusho, 4-1, Chuo 1-chome Wako-shi, Saitama 351-0193 (JP). **GOTO, Hajime** [JP/JP]; Kabushiki Kaisha Honda Gijutsu Kenkyusho, 4-1, Chuo 1-chome Wako-shi, Saitama 351-0193 (JP).(74) Agents: **BUCCA, Daniel et al.**; McDermott, Will & Emery, 600 13th Street, NW, Washington, DC 20005-3096 (US).(71) Applicants (for all designated States except US): **THE PENN STATE RESEARCH FOUNDATION** [US/US]; 304 Old Main, University Park, PA 16802 (US). **HONDA GIKEN KOGYO KABUSHIKI KAISHA** [JP/JP]; 1-1, Minami-Aoyama, 2-chome Minato-ku, Tokyo 107-8556 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,

[Continued on next page]

(54) Title: PURIFICATION OF CARBON FILAMENTS AND THEIR USE IN STORING HYDROGEN

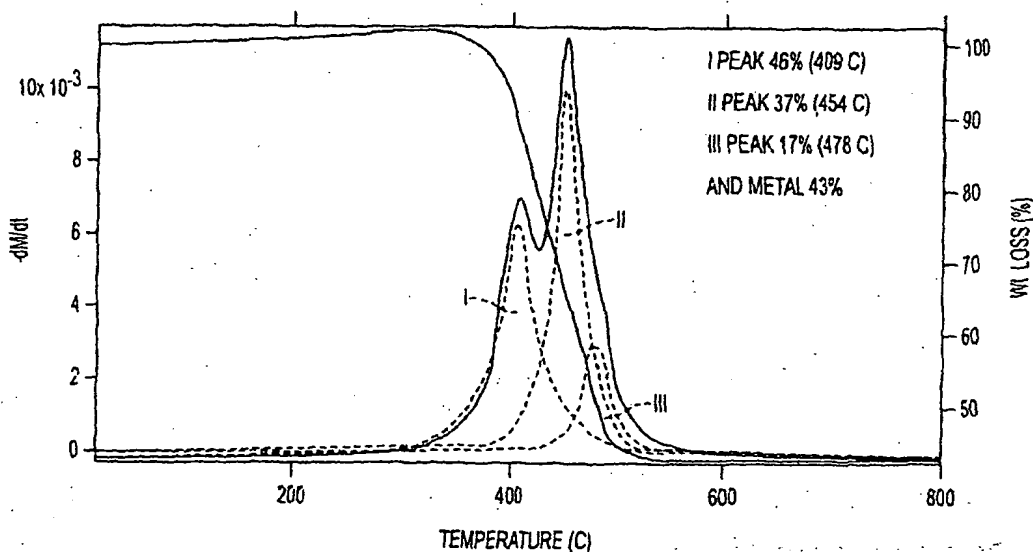

(57) Abstract: Carbon structures, e.g. carbon nano-fibers, suitable for absorbing hydrogen at low pressures and low temperatures are produced by a selective oxidation and/or acid reflux process. The process includes heating an impure mixture containing a crystalline form of carbon in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and remove a substantial amount of any amorphous carbon impurities from the mixture. Metal containing impurities can be removed from the mixture by exposing the desired carbon and accompanying impurities to an acid to produce a carbon fiber that is substantially free of both non-fiber carbon impurities and metal impurities. Another aspect of the present invention includes purified carbon structures that can store hydrogen at low pressures and temperatures.

WO 02/083556 A2

Best Available Copy



MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PURIFICATION OF CARBON FILAMENTS AND THEIR USE IN STORING HYDROGEN

Cross-reference to Related Applications

[01] This application claims priority from U.S. Provisional Patent Application Serial No.: 60/324,066 filed September 24, 2001, entitled, "PURIFICATION OF CARBON FILAMENTS AND THEIR USE IN STORING HYDROGEN" and U.S. Provisional Patent Application Serial No.: 60/283,470 filed April 14, 2001, entitled, "PURIFICATION OF CARBON FILAMENTS USED FOR HYDROGEN STORAGE AT LOW PRESSURE AND CRYOGENIC TEMPERATURE" the entire disclosures of which are incorporated herein by reference.

Field of the Invention

[02] The present invention relates to carbon filaments and processes for their production and more particularly to a process for obtaining purified single-walled nanotubes these materials have utility in the fields of chemistry, drugs, electronics, transportation, among others.

Background

[03] Single-wall carbon nanotubes (SWNTs) were reported simultaneously by Iijima and co-workers at NEC and by Bethune and co-workers at IBM as early as 1993. The structure of a SWNT has been described as a single graphene sheet rolled into a seamless cylinder (Science of Fullerenes and Carbon Nanotubes, M. S. Dresselhaus et al. Ed., Academic Press. 1996). These materials are considered commercially important for a number of new technologies and as replacement materials for current technologies.

[04] Fuel-cell-powered ground transportation, for example, has been recognized by the U.S. Department of Transportation (USDOT) and automobile manufacturers worldwide as a

desired technology and a growing interest has developed for employing carbon nanotubes for these applications. For example, hydrogen storage in a carbon-based material has the recognized advantage of overall low weight. While fuel cell technology is relatively advanced, the technology for storing the fuel, such as hydrogen, lags in the development of a viable fuel-cell-powered vehicle. The USDOE has estimated that storing approximately 6 to 7 weight percent (wt%) of hydrogen should be the benchmark for a feasible hydrogen storage technology. Hydrogen storage is the wt% of hydrogen stored measured relative to the storage system.

[05] The physical adsorption of gases within micropores ($D < 2$ nm) in carbon materials has been actively studied for some time. Many such microporous carbon materials have been developed with very high specific surface area, e.g., A_s of approximately 1000 - 3000 m²/g. These materials, however, tend to be disordered and have convoluted surfaces exhibiting local sp² C-C bonding. These materials, they have been tested for hydrogen storage and are not been considered promising.

[06] Significant H₂ storage has been reported in nanofilamentary carbon at room temperature, however. For example, it has been reported that 5-10 wt% of hydrogen can be stored in bundles of single-walled carbon nanotubes (SWNT), 10-20 wt% of hydrogen can be stored in alkali metal-doped SWNTs, and also about 50 wt% of hydrogen can be stored in carbon nanofibers. Cryogenic hydrogen storage of approximately 8 wt% has also been reported using high pressures, e.g., pressures of about 100 atm. None of these reports have been confirmed in other laboratories and, in some cases, the accuracy and validity of these reports have been questioned suggesting that the published values were the result of experimental error. Hence, it is difficult to build upon the efforts of others in this developing field of hydrogen storage technology.

[07] Moreover, many of the proposed applications of SWNT, including nano-electronic devices, field emitters, gas sensors, high-strength composites, and hydrogen storage require reasonably pure SWNT materials. Typical synthetic methods currently produce carbon tubes having a diameter in the range of 1-2 nm and arranged in the form of bundles. One particular problem associated with conventional synthetic techniques is that the intended SWNT is a minority constituent in the reaction product. Also present, for example, are amorphous sp²

carbons which coat the fiber walls and multi-shell carbon species which cover metal catalyst impurities that result from the catalytic production of conventional carbon fibers and SWNTs. It is a challenging problem to separate the desired SWNT from its accompanying mixture of amorphous carbon impurities, multi-shell carbon species and metal impurities without adversely damaging the carbon fiber or the tube walls.

[08] Many purification procedures have been developed to remove the inherent contaminants from carbonaceous soots produced in an effort to obtain the desired SWNT. These methods include hydrothermal treatment, gaseous or catalytic oxidation, nitric acid reflux, peroxide reflux, cross flow filtration, and chromatography.

[09] These treatment, however, tend to chemically destroy a significant portion of the desired carbon nanotubes, require excessive production times and, in the case of arc produced carbon nanofibers, have a marginal effect in purifying the desired carbon nanofibers from its impurities, such as amorphous carbon phases and graphitic carbon phases covering metal impurities. It is also unfortunate that the results of many of these purification processes have not been even semi-quantitatively determined with respect to the purity of the final product. Thus, they have been of little aid to the skilled artisan in advancing the understanding of purification procedures thereby reducing the predictability of successfully achieving a process of purifying SWNT in high yield and throughput.

[10] Furthermore, most of the purification processes reported previously were for carbon-nanofibers produced by a pulse laser vaporization (PLV) process which inherently produces smaller amounts of catalyst residue and smaller amounts of multi-shell carbon phases as well.

[11] Accordingly, a need exists for the efficient purification of carbon fibers, particularly nanosized carbon fibers in high yield and throughput.

Brief Summary

[12] An advantage of the present invention is a facile method of obtaining carbon structures from an impure mixture in high yields.

[13] Another advantage of the present invention is the synthesis of single-walled nanotubes suitable for hydrogen storage.

[14] Additional advantages and other features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from the practice of the invention. The advantages of the invention may be realized and obtained as particularly pointed out in the appended claims.

[15] According to the present invention, the foregoing and other advantages are achieved in part by a process of reducing the amount of amorphous carbon from a carbon mixture. The process comprises heating an impure mixture containing amorphous carbon and at least one crystalline form of carbon in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and reduce the amount of amorphous carbon impurities from the mixture. Advantageously, the present inventive process permits the purification of single-walled nano-tubes from relatively inexpensive, yet difficult to purify, arc-derived soot. These soots typically have a substantial amount of amorphous carbon as well as other undesirable carbon forms in addition to the desired carbon structures. These undesirable carbon forms can be reduced, i.e. lowered from their initial concentration of untreated material, by selective oxidation. Metal containing impurities can also be reduced or removed from the mixture by exposing the desired carbon structures and accompanying impurities to an acid to produce a carbon structure, e.g. carbon fiber, that is substantially free of the undesirable carbon, i.e. carbon impurities, and metal impurities. Additional processing steps can include heating the purified carbon structure under vacuum to anneal the carbon structure to ameliorate part or all of any defects that were formed in the carbon structure during the purification process or other wise.

[16] Embodiments of the present invention include heating the impure carbon mixture in the presence of an oxidizing gas to a temperature from about 295 °C to about 500 °C, e.g. from about 350 °C to about 410 °C, to reduce carbon impurities, such as amorphous carbon and graphitic carbon covering metal containing impurities; removing metal containing impurities by exposing the impure mixture to an acid, e.g. nitric or hydrochloric acid, at a temperature from about 25 °C to about the boiling temperature of the acid.

[17] Another aspect of the present invention is a process of purifying a carbon nano-fiber. The process comprises heating an impure mixture containing the carbon nano-fiber in the

presence of an oxidizing gas, e.g. air, and at a temperature and time sufficient to selectively oxidize and reduce the amount of carbon impurities from the mixture. Metal containing impurities, e.g. metal catalyst and their salts, are reduced or substantially removed from the mixture by exposing the mixture to an acid, e.g. hydrochloric acid, to produce a carbon fiber reduced or substantially free of carbon impurities and metal containing impurities. The purified carbon-nano-fiber can then be subjected to heat, e.g. about 220 °C to about 1000 °C, under a vacuum, e.g. between about 10^{-8} Torr to about 10^{-6} Torr, to ameliorate damage to the tubes caused by or in addition to the purification process.

[18] Another aspect of the present invention includes a material for storing hydrogen at low pressures comprising a purified single-wall carbon nanotube having opposing open ends or open passages, i.e. open holes. Advantageously, the material can store more than about 6 weight percent (wt/%) of hydrogen, e.g., about 6.5 wt%, at a temperature of about 77 K and at a pressure of less than 2 atmospheres. Hydrogen can be stored in a single-wall carbon nanotube having openings therein simply by: a) subjecting a purified single-wall carbon nanotube to hydrogen gas at a pressure of no more than about 2 atmospheres and a temperature of about 77 K.

[19] In an embodiment of the present invention, carbon-nano-tubes having open ends can be synthesized by a process comprising the sequential steps of: a) heating a carbon based mixture comprising a single-wall carbon nanotube and accompanying impurities in the presence of an oxidizing gas at a temperature sufficient to selectively remove a substantial amount of carbon impurities; b) exposing the mixture to an acid sufficient to remove a substantial amount of metal impurities; and c) exposing the single-wall carbon nanotube to nitric acid at a temperature and time period sufficient to introduce openings in the single-wall carbon nanotube.

[20] Another aspect of the present invention is a process for producing a nano-structured carbon suitable for absorbing hydrogen at low pressures and low temperatures. The process comprises the sequential steps of: a) refluxing a nano-structured carbon with an agent to partially oxidize the surface of the nano-structured carbon and form functional groups other than hydrogen thereon; b) washing the nano-structured carbon in water; c) drying the nano-structured carbon; and d) heating the nano-structured carbon, e.g. heating over about 650 °C,

under vacuum, e.g. under a vacuum of about 10^{-6} Torr or higher, to substantially remove the functional groups on the surface of nano-structured carbon. The present invention contemplates that the surface of the carbon structure has at least one group or moiety selected from the group consisting of: a carboxyl group (-COOH), an aldehyde group (-CHO), a carbonyl group ($>C=O$); methylene coupling and ether coupling. It is believed that refluxing by acid to oxidize the surface as well as removing the formed functional groups by heating facilitates improvements in the final product for hydrogen storage suitability.

[21] Additional advantages of the present invention will become readily apparent to those having ordinary skill in the art from the following detailed description, wherein the embodiments of the invention are described, simply by way of illustration of the best mode contemplated for carrying out the invention. As will be realized, the invention is capable of other and different embodiments, and its several details are capable of modifications in various obvious respects, all without departing from the invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not as restrictive.

Brief Description of the Drawings

[22] The various features and advantages of the present invention will become more apparent and facilitated by reference to the accompanying drawings, submitted for purposes of illustration and not to limit the scope of the invention, where the same numerals represent like structure and wherein:

[23] Fig. 1 illustrates Temperature Programmed Oxidation (TPO) and Derivative Temperature Programmed Oxidation (DTPO) profiles of a raw, arc-derived soot which contains SWNTs.

[24] Fig. 2a and 2b show TPO and DTPO profiles, respectively, of a purified SWNTs by selective oxidation followed by mild acid refluxing in accordance with an embodiment of the present invention compared to commercially purified Pulse Laser Vapor (PLV) carbon nanotubes.

[25] Fig. 3a and 3b are Transmission Electron Microscopy (TEM) micrographs of a raw, Arc-derived soot.

[26] Fig. 4a and 4b are TEM micrographs of a SWNTs after selective oxidation in accordance with an embodiment of the present invention.

[27] Fig. 5 shows a TEM image of purified SWNTs in accordance with an embodiment of the present invention.

Description of the Invention

[28] The present invention addresses the problems associated with the separation of desired crystalline carbon forms, e.g. filamentary carbon, produced from a mixture containing undesirable carbon forms, e.g. amorphous carbon impurities, and metal containing impurities. After extensive experimentation and investigation, an effective, non-destructive purification process was developed to obtain filamentary carbon, e.g. single-walled nanotubes, in high yields from such mixtures.

[29] The present invention stems from the discovery that amorphous carbon impurities can be selectively oxidized and, thus, reduced or removed from carbon mixtures, such as arc-derived carbon soots to generate purified carbon fibers. Since the initial carbon mixture contains these undesirable carbon impurities, any amount of a reduction is beneficial.

[30] It was also observed that the integrity or viability of semi-crystalline or multi-shell carbon covering metal catalyst impurities in these soots are reduced during the selective oxidation process thereby rendering the metal impurities more susceptible to removal. It was discovered that the use of these purified carbon fibers can store relatively high amounts of H_2 . The results are significant, as the hydrogen storage in these purified carbon fibers and/or tubes can occur at relatively low pressures, e.g. at pressures of about 1-2 atmospheres.

[31] In order to address the difficulties of achieving an effective purification process for separating the desired crystalline carbon structures from an impure mixture, it was necessary to gain an understanding of the causes underlying such problems. A quantitative study was undertaken to evaluate the effectiveness of a purification process involving the selective oxidation of the commercially available soots. Results are presented on soots produced by arc-discharge (AD), which are believed to be difficult to purify.

[32] In accordance with one aspect of the present invention, a simple selective oxidation-acid reflux process can be employed to achieve purification of gram quantities of raw arc-derived SWNT materials (which is unsuitable for purification by the existing purification methods) in excess 85 wt %. In studying the underlying aspects of the purification process, quantitative evaluation of different phase (wt%) of carbons was determined as a function of purification treatments by using Temperature Programmed Oxidation (TPO). It was discovered that initial selective oxidation to remove amorphous carbon does not adversely effect the carbon tubes in the soots and that selective oxidation has the added benefit of removing or weakening multi-shell carbon. The exposed metal particles can then be successfully removed by acid, e.g. HCl, treatment under less severe conditions than conventionally employed. It is believed that the specific working examples provided in this disclosure is applicable to industrial, e.g. large scale, purification of SWNTs and also applicable to a variety of other nanofiber mixtures, i.e., graphitic nanofiber (GNF), vapor grown graphitic fiber (VGF), pulse laser vaporization (PLV), arc discharged (AD), etc.

Examples

[33] The raw soots produced by AD were prepared as described earlier (C. Journet et al., Nature vol 388, pp 756) and received as dry powders from Carbolex, Inc. of Lexington, KY. Chemical analysis of these soots were carried out by temperature programmed oxidation (TPO) using a TG-50 Mettler thermogravimetric analyzer (TGA). The TGA reaction conditions included a 5 °C/min heating rate starting from about 25 °C and ending at about 1000 °C under a flow of dry air at about 100 sccm. From the first derivative of the TPO curve, or the DTPO curve, the preferential oxidation temperatures of the different phases of carbon in these soots were determined, as described below.

[34] For purification, raw SWNT soot was selectively oxidized under conditions defined by the TPO results. The soot was then refluxed in hydrochloric acid (HCl) using standard Pyrex glassware for a few hours, and the suspension was then filtered through a polycarbonate membrane filter (pore size =1 µm, available from Corning, Inc.). The filtrate was carefully washed with deionized water, and then dried. Transmission electron

micrographs of the SWNT soots were observed on a JEOL JEM 1200EX microscope with electron beam energy of 120 KV.

[35] The term "temperature programmed oxidation" (TPO) was apparently coined by C. A. Querni et al. J. Catal. 141 (1993) 389. TPO in a TGA has been used, inter alia, invention to analyze carbonaceous soots produced by arc discharge. The soot is maintained in a flow of dry air and the temperature (T) is ramped from about 25 – 1000 °C, linearly in time, and thus the T-dependance of the soot mass $m(T)$ can be measured. With increasing T, carbon is converted to CO_2 and $m(T)$ decreases. Characteristic combustion temperatures of various carbon phases in the soots, e.g., amorphous carbon, SWNT, and multi-shell or graphitic carbon, can be identified from the peak positions in the derivative data (DTPO), i.e., dm/dT vs T data. Figure 1 shows the TPO and DTPO profiles of the raw AD soot. The DTPO data is fit by a sum of Lorentzian, as shown in Fig. 1 by the broken lines. From the fitted data, the effective oxidation temperatures T_{ox} for amorphous carbon (409 °C), SWNT (454 °C), and multishell and graphitic carbon (478 °C) was determined. The identifications of the peaks with the respective carbon phases are consistent with the literature and are supported by TEM images, as discussed below. It should be noted that the T_{ox} can be shifted downward by the presence of a catalyst in the soot.

[36] The fraction of carbon in the soot in the form of amorphous carbon, SWNT and multishell carbon is identified with the area under the respective Lorentzian in the DTPO data. For example, from the DTPO peak areas in Fig. 1, it can be determine that the raw AD soot contains the following carbon fractions: 46 % amorphous (sp^2) carbon, 37 % SWNT and 17 % multishell carbon (it should be noted that these are fractional percentages, not wt%; for the wt% see Table 1). The metal content (wt %) in the soot is obtained from the high temperature mass in the TPO curves, i.e., metal cannot be converted to CO_2 , even at elevated temperatures. From the TPO profile in Fig. 1, it can be seen that 43 wt % of the raw AD soot should be identified with catalyst residue, or non volatile metals or metal compounds such as carbides. The results from TPO and DTPO data for the various raw and purified soots are summarized in Table 1.

[37] From the DTPO data on raw AD soot in Fig 1, it can be seen that the oxidation temperature range of amorphous carbon and multishell carbon overlaps the oxidation range

for SWNTs. Hence, it is expected that for this example the amorphous and multishell carbon impurities cannot be completely removed without some attendant loss of SWNT by oxidation. To minimize the loss of SWNTs, the following conditions were selected to purify AD soot in flowing dry air: linear heating rate of 5 °C/min from about 24 to about 405 °C, followed by an about 405 °C soak for about 30 min, then the system is cooled down to room temperature in approximately 1 hr. This thermal oxidation weakens or completely removes the multishell carbon covering the metal catalyst particles (as shown by TEM). Mild acids such as 4 molar (M) hydrochloric (HCl) can then be used to remove the metal catalyst residue. Moreover, without prior selective oxidation, acid reflux for extended times (even using HNO₃) was found to be ineffective for the removal of metal from the soots.

[38] Figure 2 shows the TPO/DTPO profiles for the AD soot after selective oxidation and acid reflux processes. Refluxing was carried out in 4 M HCl for about 4 hr. The DTPO data for the purified sample shows one dominant carbon peak (representing SWNTs) and a weaker carbon peak representative of residual multishell carbons; a peak representative of amorphous carbon could not be found. Hence, in this example, all measurable amorphous carbon was removed. Lorentzian analysis of the DTPO peaks for the purified AD soot yielded the following carbon fractions: 85 % SWNTs (T_{ox} of about 507 °C) and with 15 % of multi-shell carbon (T_{ox} about 700 °C). Relative to T_{ox} (SWNT) for the raw AD soot, it can also be seen that the oxidation temperature of the SWNT shifts upward by about 50 °C to approximately 507 °C, which is still lower than the temperature reported in the literature. This shift in T_{ox} can be attributed to the presence of residual metal catalyst in the AD purified soot. The high temperature TPO data shows that the metal content in the soot was reduced from 42 wt % (Fig. 1) to 6 wt % after the two-step purification treatment.

Table 1.

Sample	Amorphous Carbon	SWNT	Multi-shell Carbon	Metal Impurity
	wt (%)			
AD-A Raw arc-discharge formed SWNTs	26.2	21.1	9.7	43
AD-A1 AD treated with 4 N HCl for 6 hours	27.1	40.3	6.6	26
AD-A2 AD treated with 12 N HCl for 6 hours	24.8	44.2	5.0	26
AD-A3 AD treated with 4 N HCl for 24 hours	25.2	44.2	4.6	26
AD-SO-1 AD, after selective oxidation (SO) refluxed with 4 N HCl for 6h	0	73	12.8	14
AD-SO-2 AD, after SO refluxed with 4 N HCl for 24h	0	82	11.8	6.2
AD-B Raw arc-discharge tube	25.5	37.5	4	33
AD-B-SO AD, after SO refluxed with 4 N HCl for 24h	2	75	13	10

[39] Figure 3 shows the TEM micrographs of the raw AD soot. The presence of a thick amorphous coating on the SWNT ropes is easily observed, along with multishell carbon in the form of carbon nanoparticles, and as a coating for the metal (catalyst) particles. After selective oxidation treatment, TEM images (Fig. 4) show the presence of tangled bundles of SWNT, with no apparent structural damage to the SWNT. Inspection of the tube walls

indicates that essentially all of the amorphous carbon coating on the SWNT burns off, i.e. oxidizes. It is apparent from this result that most of the multi-shell carbons also burns off leaving behind almost bare catalyst particles 5 -10 nm in diameter strongly adhering (even wetting) the surface of the rope of SWNT. During this selective oxidation an approximate 30 wt% loss was observed from the sample (by TGA). The TEM images show that the metal particles are strongly bound (with diameter of 5 -10 nm) to the SWNT rope. Other TEM images have shown that even after sonication, these metal particles remain firmly attached to the rope walls. For AD soot, it can be shown that ultrasonication followed by purification is not successful, as the catalysts and metal impurities appear to be quite strongly bound to the tube wall, even wetting the bundle walls in many cases. After selective oxidation, TEM images show that carbon coatings on some of the metal particles remains, as shown in Fig. 4b. In Fig. 5, the TEM image of purified SWNTs (selective oxidation followed by HCl reflux), it is observed that most of the catalysts and other metal containing impurities have now been removed. It is further observed what appears to be the "fingerprint" of metal particle attachment. As indicated in Fig. 5, the fingerprint appears as wall defects on the tubes on the outside of the bundle. These defects may provide access to the interior of the SWNT for gases and dopants.

[40] By using TPO, the differentiation of different carbon phases and catalyst present in the soots can be determined. Using the selective oxidation process can reduce or completely remove the amorphous carbon and weaken the multishell carbon, which allows the acid to more effectively affect metal particles and successively reduce or completely remove them. As described by Dujardin et al. Solid State Communication, 114 (2000) 543, some of the metal clusters or isolated atoms are distributed between and within the nanotube, which are difficult to remove. It was also observed by TEM that some of the metal particles wet the tube walls which are difficult to remove. Using the DTPO, the quantification, by wt %, of SWNTs present in the raw as well as in the purified materials can be determined. It should be understood that, as TPO is a catalytic process, the presence of metal containing compounds in the carbon mixture changes the oxidation temperature of the metal contaminated carbon even though the carbon structures are the same. In order to use this process most effectively, an analysis of the soots from each batch is preferred. The purified

SWNTs are currently studied in our lab for the Kondo effect in the SWNTs i.e., coupling of conduction electrons in SWNT walls to localized magnetic moments of transition metal catalyst impurity e.g., Ni.

[41] In another example, high yields of SWNTs were obtained from soot. The process begins by producing an impure mixture of SWNTs employing a catalyst comprising nickel, yttrium, titanium, their salts or any combination thereof. The SWNTs were isolated by first heating the carbon soot comprising a single-wall carbon nanotube and accompanying impurities in air at a temperature of about 500 °C for a period of about 1 hour. By this step, a significant amount of amorphous carbon was eliminated from the mixture. It is believed that the multi-shell carbon coating or carbon otherwise covering metal containing impurities was rendered more susceptible to removal along with the metal containing impurities themselves. The SWNT and any accompanying impurities were then exposed to about 3 molar of aqueous HNO_3 at a temperature of about 120 °C for about 12 hours to facilitate removal of nickel containing impurities, such as nickel or salts thereof. The SWNT were then subjected to additional processes for removing carbon impurities, such as exposing the single-wall carbon nanotube and any accompanying impurities to aqueous hydrogen peroxide at a temperature of about 80 °C for about 24 hours. To remove titanium containing impurities or salts thereof, the SWNTs and any accompanying impurities were then exposed to about 10 molar HCl at a temperature of about 120 °C for about 12 hours.

[42] It is possible that nano-structure carbons as well as carbon nanotubes absorb hydrogen. Many functional group containing oxygen were produced by acid treatment using HNO_3 under refluxing conditions. It is thought that the high storage performance of these purified carbon structures comes about by removing functional groups on the surface of the carbon structures and thus increasing the surface activity. The structure is believed to change during oxygen desorption by heat treatment and is considered to generate sites that effectively cause hydrogen adsorption. The desorption site of CO is in the temperature range of from about 300 °C to about 650 °C, while the desorption site of CO_2 is in the processing temperature range of from about 100 °C to about 650 °C.

Examples of Hydrogen Storage

[43] Using a standard *in situ* gravimetric (mass uptake) method, it was observed that arc-derived, single walled carbon nanotubes can store as much as 6.5 wt% hydrogen at liquid nitrogen temperatures (i.e., $T = 77\text{ K}$) for pressures (P) of about 2 atmospheres (atm). The material is first subjected to a treatment designed to open holes in the tube walls. By this process, considerable tube wall damage is introduced which may add sp^3 character to the surface. Results of theoretical calculations are performed that supports a large increase in the binding energy for hydrogen adsorbed on a "rough" nanotube surface derived from missing atoms that were removed in the activation treatment.

[44] The SWNTs material used in these studies were obtained from Carbolex, Inc. By temperature programmed oxidation (TPO), the material was found to contain approximately 5 atomic % (at%) residual catalyst (mostly Ni). The raw (i.e., as-delivered CarboLex, Inc.) material was analyzed by high resolution transmission electron microscopy (HRTEM) image, Fig. 3a and b. This SWNT material was first processed to remove undesirable amorphous carbon via a selective oxidation at a temperature of about 350-410 °C in dry air for 30 min. This oxidation was found to weaken the carbon coating passivating most of the metal catalyst particles in the soot to the extent that the metal could be removed via an 8 hr reflux with a mild mineral acid, e.g. 4.0 M HCl at a temperature of about 130°C. The results of the HCl reflux are shown in the HRTEM image. In order to remove endcaps and open holes (introducing defects) in the nanotube walls, these samples were treated by refluxing in 2.6 M HNO_3 at a temperature of about 130 °C for about 2-200 hrs. These samples were then washed in distilled water until neutral, i.e. pH equal to about 7.0 was achieved. After this treatment, significant wall damage can be seen in the HRTEM image (Fig. 4a and b). Much of this HNO_3 -induced wall damage can be reversed by heating the refluxed material in a high vacuum (P of about 10^{-8} Torr) to 1200 °C (Fig. 5).

[45] Hydrogen storage was studied on 75 mg samples at $T = 77\text{K}$, 200 and 300 K and at pressures between about 0 and about 20 bar in a thermogravimetric analyzer (TGA) (Hyden, Inc. IGA-3) using ultra high purity (UHP) H_2 (99.999%) passed through an oxygen/moisture trap. Before hydrogen loading, the samples were first heated *in situ* at a vacuum of about 10^{-8}

⁶ Torr to a temperature in the range of about $200^{\circ} < T < 1000^{\circ}\text{C}$ for 12 h. The wt% H_2 stored at each pressure was collected after the pressure did not appreciably change. This was usually achieved in less than 20 min. The wt% data, corrected for buoyancy effects, was checked on several samples.

[46] The data show the wt% hydrogen uptake for samples refluxed in HCl and HNO_3 . The data are collected at temperatures of $T = 77\text{ K}$, 200 K and 300 K and for pressures up to 16 bars. The various curves are also identified with samples treated under different degassing conditions (temperature/time). The aggressive oxidation in HNO_3 (Fig. 4 a and b) has had a significant effect on the wt% storage. It is believed that the aggressive HNO_3 treatment creates wall damage that allows H_2 access to the internal pores within the SWNTs in the bundle. Additionally, it is believed that the HNO_3 -reflux conditions has created a roughened tube wall surface. A discussion of this roughness and enhanced binding energy follows.

[47] Although the triangular shaped "interstitial channels", formed at the center of the void created by three parallel adjacent tubes in a bundle, is expected to have the highest binding energy for hydrogen in the bundle, these sites contribute only about 1/8 of the total sites. It is expected that the high storage values observed in these experiments then are associated with the internal pores within individual tubes. Consistent with a physisorption process, decreasing the temperature from $T=300\text{ K}$ to 77 K dramatically increases the storage.

[48] A feature of an embodiment of the present invention is that most of the hydrogen storage can be obtained at quite low pressures, i.e., P of less than about 1-2 bar. This indicates that the binding energy of the important sites within the bundles of SWNTs is significantly higher than those found in the SWNT samples of Ye et al. Applied Phys. Lett. 14 (1999) 2307 which stored significant amounts at $T = 77\text{ K}$, but at much higher pressures. The connection of the "characteristic storage pressure" p^* , which is defined herein as the pressure at which half the maximum observed amount is stored, to the binding energy of H_2 on the carbon surface can be understood as follows.

[49] The storage of hydrogen was studied with respect to purified SWNTs by various purification steps and is summarized Table 2. The table also provides for the atomic percent metal residue and the specific surface area (SSA) (m^2/g). The vacuum heat-treatment and the SSA measurements were made *in situ* in the TGA just prior to hydrogen loading. The

SSA values of 80-470 m²/g are low compared to the maximum geometric surface area of a large bundle of open SWNTs, which is expected to be about 1350 m²/g. It is believed that the SSA does not correlate well with wt% hydrogen storage. Although the theoretical SSA associated with an internal pore surface of approximately 1.4 nm diameter SWNT is about 1350 m²/g, no one has yet reported values exceeding about 400 m²/g for SWNT materials. This suggests that many of the internal pores in a real material have gateways smaller than the kinetic diameter of N₂, i.e. about 0.36 nm. This restricted gateway may be associated with the presence of carboxylic acid and other functional groups attached to the carbon atoms edging holes in the tube walls or at open tube ends.

Table 2. Sample history and hydrogen storage at 77 K and 1 atmosphere.

Sample ID	Sample History	SSA ⁴ (m ² /g)	H ₂ (wt%)	Vacuum Anneal T(°C)/time (hr)	Metal (at %) ⁵
A	As Prepared	270	0.52	250/12	6
B	SO ¹ , HCl ²	320	1.1	250/12	1.5
C	SO ¹ , HCl ²	470	2.0	1000/20	1.5
D	SO ¹ , HNO ₃ ³	180	0.32	250/12	<0.2
E	SO ¹ , HNO ₃ ³	250	6.4	1000/20	<0.2

1. (SO) Selective Oxidation at 350 °C for 30-45 min in flowing air (100 CCM).
2. Reflux in 4M HCl at 120 °C for 6 hr.
3. Reflux in 2.6 M HNO₃ at 130 °C for 30 hr.
4. Specific Surface Area (BET).
5. Determined by (TPO).

Experimental Detail:

[50] The materials were characterized by HRTEM, TPO, Raman scattering and N₂ and CO₂ adsorption isotherms. Temperature-programmed oxidation of the samples were carried out in an gravimetric analyzer IGA-003 (Hidden Analytical Instruments). Some experimental conditions included raising the temperature from approximately room temperature to about 1000 °C with a heating rate 5 °C/min, under flow of 100 cc/min of dry air. Nitrogen and CO₂ adsorption isotherms were measured at 77 K and 300 K respectively using gravimetric analyzer IGA-003 (Hidden Analytical Instruments), prior to the adsorption, the sample was degas under high vacuum (10^{-7} Torr) at 220 °C for overnight. The specific surface area and pores sizes were calculated by using BET and DR equations.

[51] A systematic study was conducted on SWNTs (as prepared and purified) for storage of hydrogen at 77 K and up to 20 bars of pressure. The amount of hydrogen uptake increases with an increase in the number of internal tube channels. The heat treatment of the purified sample at high temperature also improves hydrogen uptake. In the open SWNTs, saturation of hydrogen adsorption takes place at low pressure, which promise a great technological advance over the traditional carbon materials.

[52] The present invention provides enabling methodology for fabricating carbon filaments and fibers, e.g. carbon nano-tubes, with improved yield, purity and efficiency. In accordance with embodiments of the present invention, a carbon soot is purified by a selectively oxidizing undesirable carbon impurities. The relative amounts of the components in the soot have been quantified before and after oxidation thereby improving the efficiency of the process. Additional process steps including acid treatment and heat treatment further removes contaminants and effects the structure of the carbon fiber, as desired. The present invention enjoys industrial applicability in manufacturing various types of carbon fiber structures, particularly nano-sized carbon filaments in high yield and substantially free of impurities.

In the preceding detailed description, the present invention is described with reference to specifically exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit

and scope of the present invention, as set forth in the claims. The specification and drawings are, accordingly, to be regarded as illustrative and not restrictive. It is understood that the present invention is capable of using various other combinations and environments and is capable of changes or modifications within the scope of the inventive concept as expressed herein.

What is Claimed Is:

1. A process of reducing amorphous carbon from an amorphous and crystalline carbon mixture, the process comprising:

(i) obtaining a carbon mixture containing at least one crystalline form of carbon and amorphous carbon; and

(ii) heating the mixture in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and reduce the amount of amorphous carbon from the mixture.

2. The process of claim 1, comprising heating the mixture at a temperature from about 295 °C to about 500 °C.

3. The process of claim 1, comprising heating the mixture in the presence of air as the oxidizing gas.

4. The process of claim 1, comprising heating the mixture for at least 30 minutes in air.

5. The process of claim 4, comprising heating the mixture at a temperature from about 295 °C to about 500 °C.

6. A process for purifying a carbon fiber, the process comprising:

(i) heating an impure mixture containing the carbon fiber in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and reduce the amount of carbon impurities from the mixture; and

(ii) reducing the amount of metal containing impurities from the mixture by exposing the mixture to an acid to produce a carbon fiber substantially free of carbon impurities and metal impurities.

7. The process of claim 6, comprising heating the carbon fiber produced after steps (i) and (ii) under vacuum.

8. The process of claim 6, comprising heating the carbon fiber produced after steps (i) and (ii) to a temperature from about 220 °C to about 1000 °C under a vacuum.

9. The process of claim 6, comprising purifying a carbon fiber produced by an arc-discharge method.

10. The process of claim 6, comprising reducing the amount of metal impurities by exposing the mixture in step (ii) to nitric acid.

11. The process of claim 10, comprising heating the carbon fiber produced after steps (i) and (ii) to a temperature from about 220 °C to about 1000 °C under a vacuum.

12. The process of claim 6, comprising heating the impure mixture containing the carbon fiber in the presence of an oxidizing gas to a temperature from about 350 °C to about 500 °C.

13. The process of claim 6, wherein the carbon impurities comprise amorphous carbon and graphitic carbon covering metal containing impurities.

14. The process of claim 6, comprising reducing the amount of metal impurities by exposing the mixture to the acid at a temperature from about 25 °C to about the boiling temperature of the acid.

15. A process for purifying a carbon nano-fiber, the process comprising the sequential steps of:

(i) heating an impure mixture containing the carbon nano-fiber in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and reduce the amount of carbon impurities from the mixture;

(ii) removing metal containing impurities from the mixture by exposing the mixture to an acid to produce a carbon fiber substantially free of carbon impurities and metal impurities; and

(iii) heating the carbon-nano-fiber under vacuum.

16. The process of claim 15, comprising exposing the mixture to nitric or hydrochloric acid to reduce the amount of metal containing impurities.

17. A material for storing hydrogen at low pressures comprising a purified single-wall carbon nanotube having open holes.

18. A material for storing hydrogen at low pressures comprising a purified single-wall carbon nanotube having opposing open ends.

19. The material of claim 17, wherein the material can store about 6.5 weight percent of hydrogen at a temperature of about 77 K and at a pressure of less than 2 atmospheres.

20. A process for synthesizing a purified single-wall carbon nanotube having open ends, the process comprising the sequential steps of:

a) heating a mixture comprising a single-wall carbon nanotube and accompanying impurities in the presence of an oxidizing gas at a temperature sufficient to selectively remove a substantial amount of carbon impurities;

b) exposing the mixture to an acid to remove a substantial amount of metal impurities; and

c) exposing the single-wall carbon nanotube to nitric acid at a temperature and time period sufficient to introduce openings in the single-wall carbon nanotube.

21. The process of claim 20, comprising, after step c), heating the single-wall carbon nanotube under vacuum.

22. The process of claim 20, comprising heating the mixture at a temperature of about 295 °C to about 500 °C to selectively remove the substantial amount of carbon impurities.

23. The process of claim 20, comprising heating the mixture at a temperature of about 350 °C to about 410 °C for a period of time of no less than 30 minutes to selectively remove the substantial amount of carbon impurities.

24. The process of claim 20, comprising exposing the mixture to the acid at a temperature of about 100 °C to about 130 °C to remove the substantial amount of metal impurities.

25. The process of claim 20, comprising exposing the heated and exposed mixture to the HNO₃ at a temperature of about 130 °C.

26. The process of claim 20, comprising exposing the heated and exposed mixture to the HNO₃ at a temperature of about 130 °C for a time period of about 2 hours to about 200 hours.

27. A process for storing hydrogen in a single-wall carbon nanotube having openings therein, the process comprising:

a) subjecting a purified single-wall carbon nanotube to hydrogen gas at a pressure of no more than about 2 atmospheres and a temperature of about 77 K.

28. The process of claim 27, wherein no less than 6 weight percent of hydrogen is stored in the single-wall carbon nanotube.

29. A process for producing a nano-structured carbon suitable for absorbing hydrogen at low pressures and low temperature, the process comprising the sequential steps of:

a) refluxing said nano-structured carbon with an agent to partially oxidize the surface of the nano-structured carbon and form functional groups other than hydrogen thereon;

b) washing said nano-structured carbon in water;

c) drying said nano-structured carbon; and

d) heating said nano-structured carbon under vacuum to substantially remove the functional groups on the surface of the nano-structured carbon.

30. The process of claim 29, wherein said agent is selected from the group consisting of HNO_3 or H_2O_2 .

31. The process of claim 29, wherein said functional group is at least one group selected from the group consisting of: a carboxyl group ($-\text{COOH}$), an aldehyde group ($-\text{CHO}$), a carbonyl group ($>\text{C}=\text{O}$); methylene coupling and ether coupling.

32. The process of claim 29, wherein said heating step comprises heating over about 650 degrees Celsius and under a vacuum of about 10^{-6} Torr.

33. The process of claim 29, wherein said refluxing and heating step disorder the structure of the surface of the nano-structured carbon.

34. The process of claim 29, wherein said nano-structured carbon is a single-walled carbon nanotube.

35. A process for synthesizing a purified single-wall carbon nanotube, the process comprising the sequential steps of:

a) heating a carbon soot comprising a single-wall carbon nanotube and accompanying impurities in air at a temperature of about 500°C for a period of about 1 hour;

b) exposing the single-wall carbon nanotube and any accompanying impurities to about 3 molar aqueous nitric acid at a temperature of about 120°C for about 12 hours;

c) exposing the single-wall carbon nanotube and any accompanying impurities to aqueous hydrogen peroxide at a temperature of about 80°C for about 24 hours; and

d) exposing the single-wall carbon nanotube and any accompanying impurities to about 10 molar HCl at a temperature of about 120°C for about 12 hours.

36. The process of claim 35, wherein the carbon soot contains nickel, titanium, or salts thereof as impurities.

37. The process of claim 35, wherein the carbon soot was prepared using a catalyst comprising nickel, yttrium, titanium, their salts or any combination thereof.

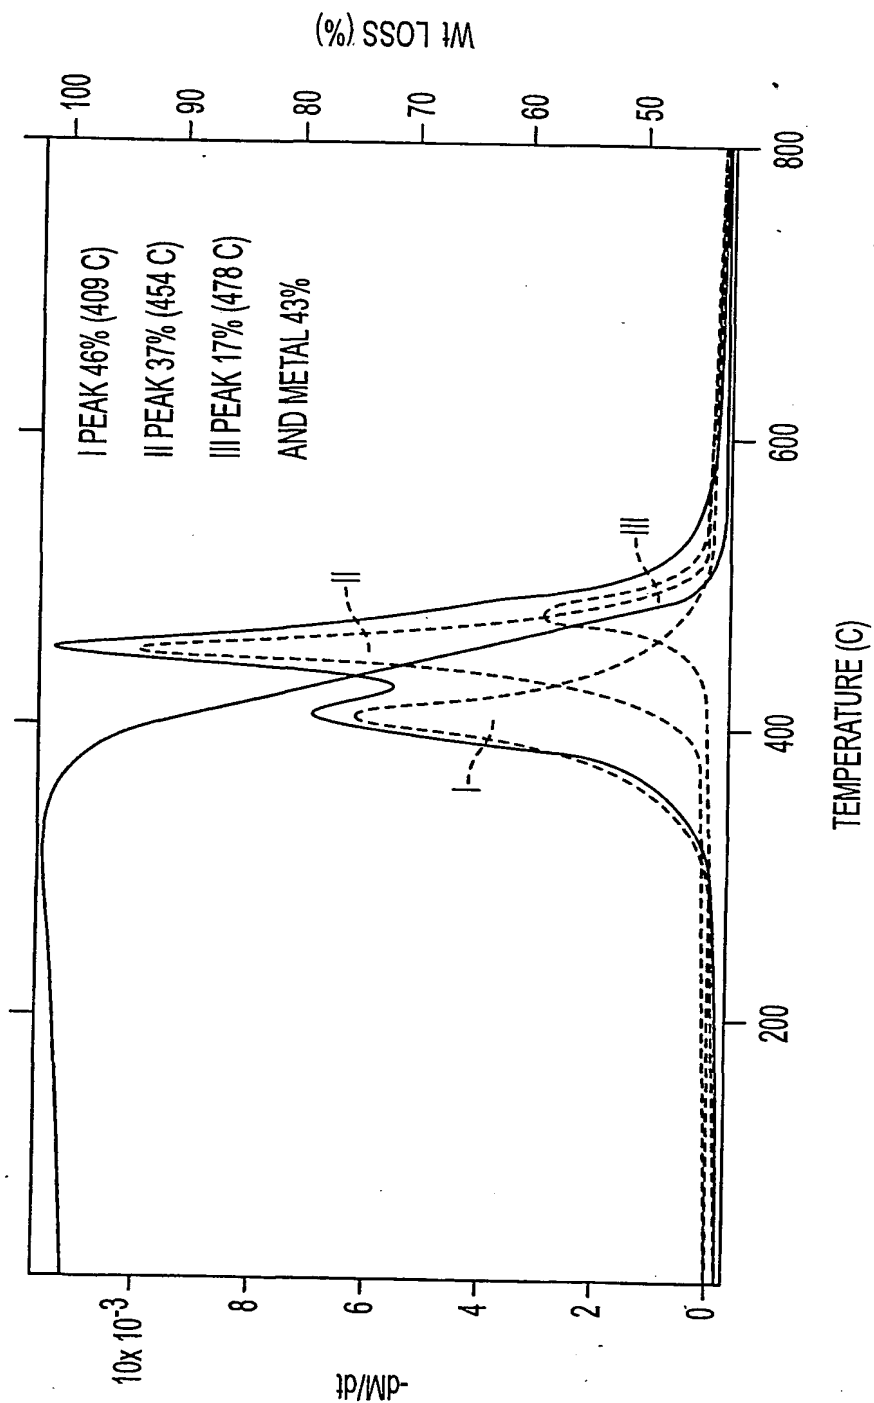


FIG. 1

2/5

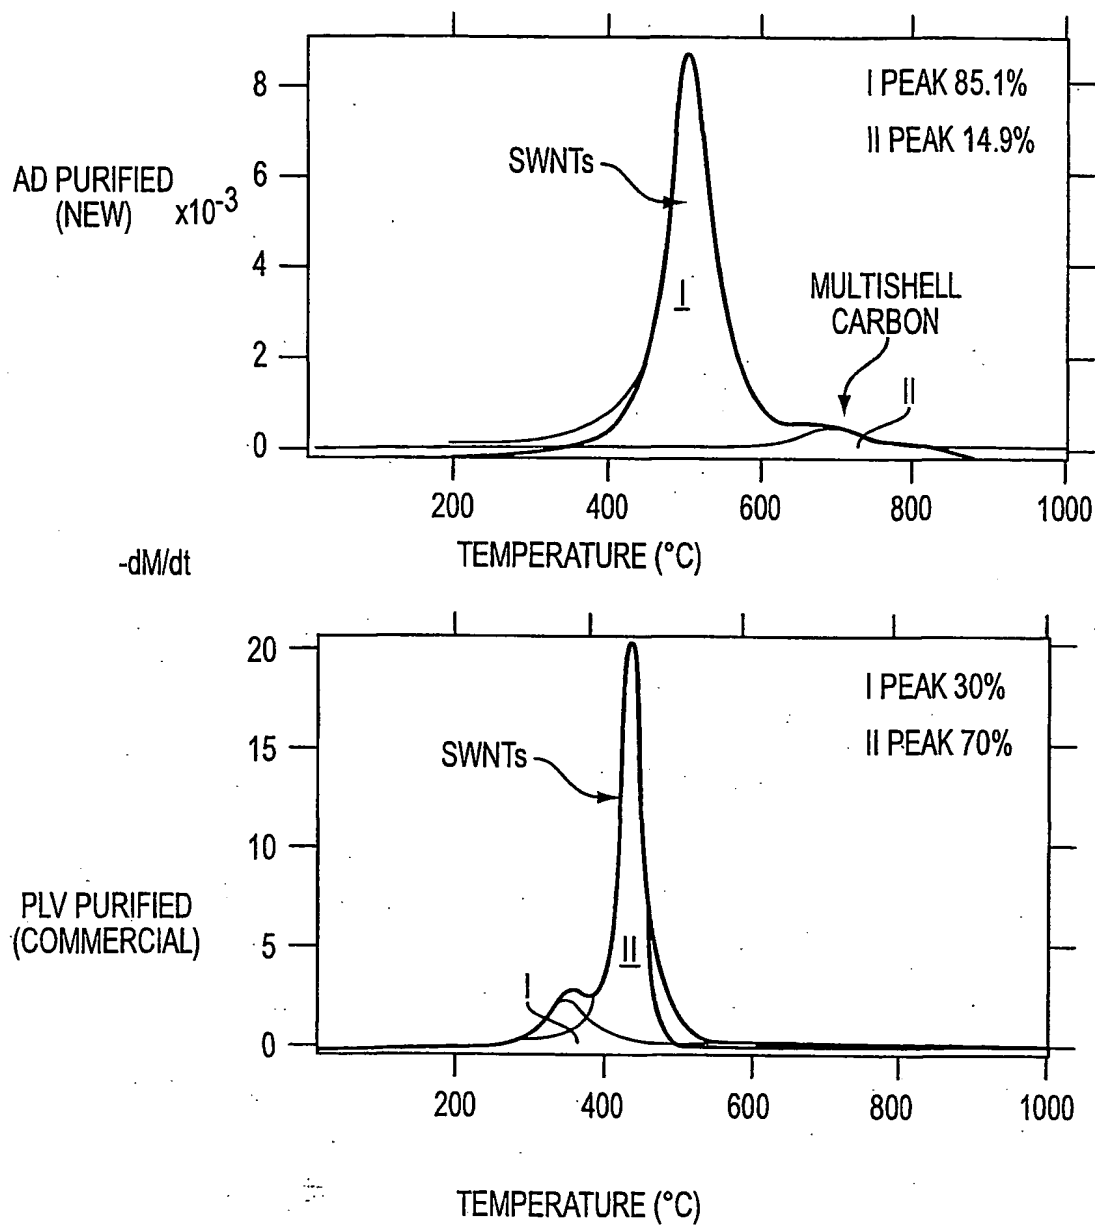


FIG. 2

SUBSTITUTE SHEET (RULE 26)

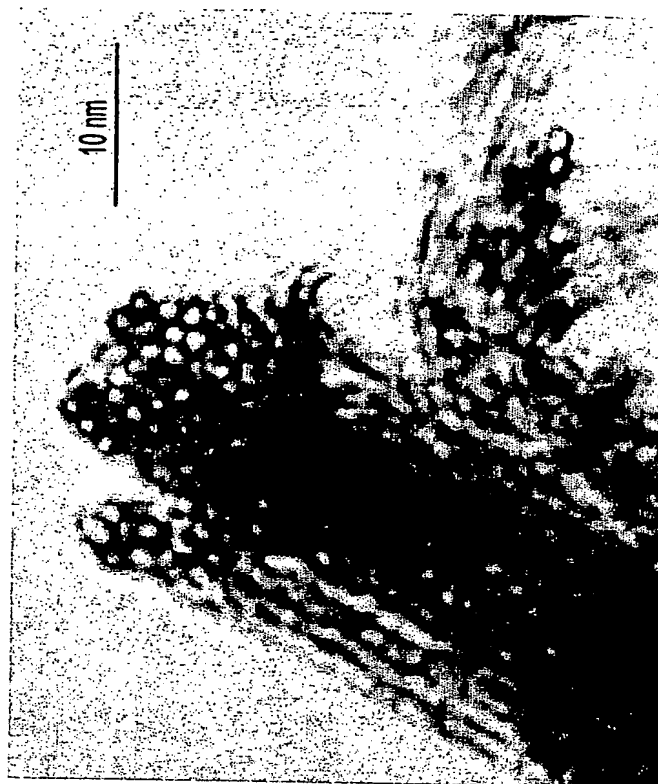


FIG. 3b

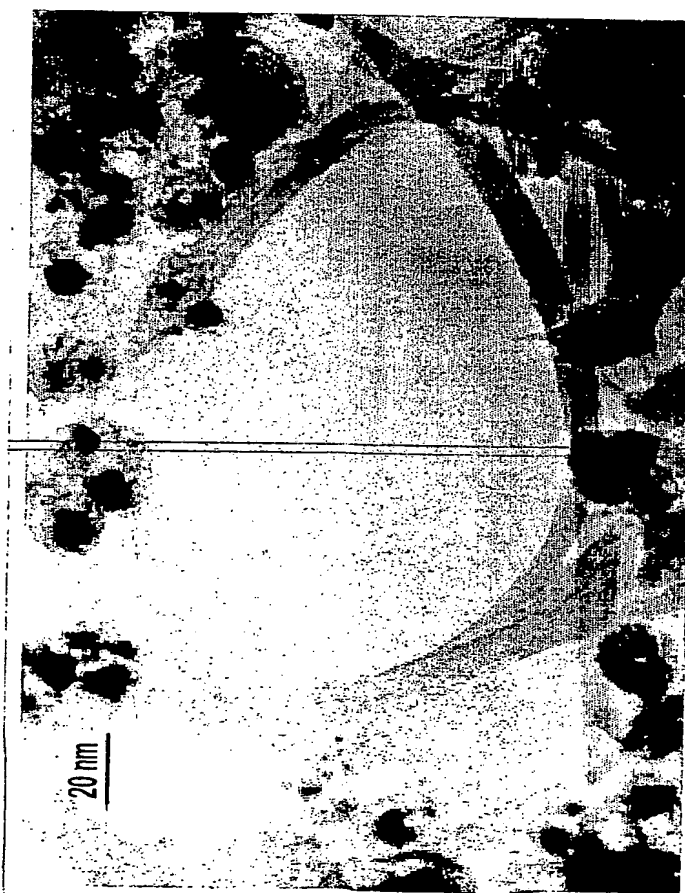


FIG. 3a

SUBSTITUTE SHEET (RULE 26)



FIG. 4b

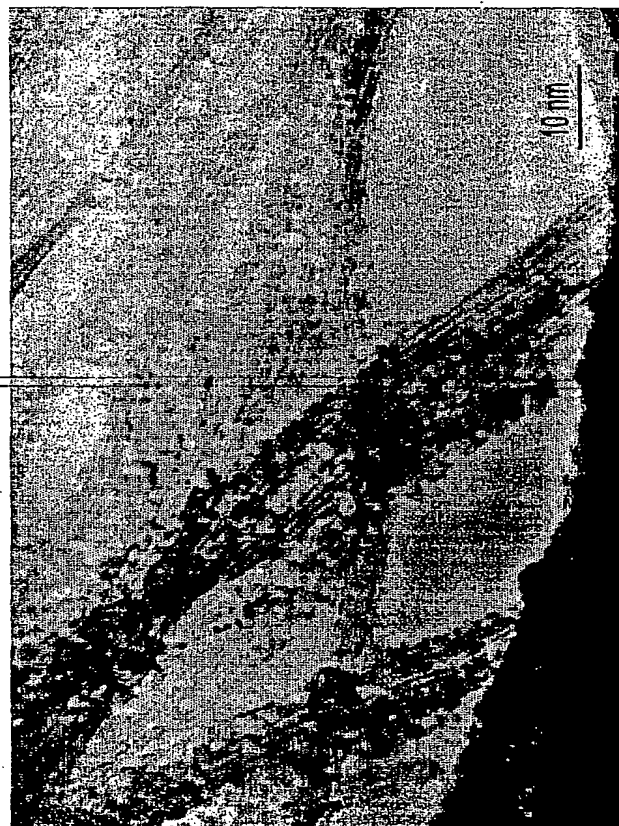


FIG. 4a



FIG. 5

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number
WO 02/083556 A3(51) International Patent Classification⁷: C01B 31/02,
D01F 9/12, C01B 3/00

(21) International Application Number: PCT/US02/11617

(22) International Filing Date: 12 April 2002 (12.04.2002)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
60/283,470 12 April 2001 (12.04.2001) US
60/324,066 24 September 2001 (24.09.2001) US(71) Applicants (for all designated States except US): THE
PENN STATE RESEARCH FOUNDATION [US/US];
304 Old Main, University Park, PA 16802 (US). HONDA
GIKEN KOGYO KABUSHIKI KAISHA [JP/JP]; 1-1,
Minami-Aoyama, 2-chome Minato-ku, Tokyo 107-8556
(JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PRADHAN,
Bhabendra, K. [IN/US]; 1404 Plaza Drive, State College,PA 16802 (US). HARUTYUNYAN, Avetik [AM/US];
A-3, 445 Waupelani Drive, State College, PA 16802
(US). EKLUND, Peter, C. [US/US]; 310 Meadow Lark
Lane, Boalsburg, PA (US). FUJIWARA, Yoshiya [JP/JP];
Kabushiki Kaisha Honda Gijutsu Kenkyusho, 4-1, Chuo
1-chome Wako-shi, Saitama 351-0193 (JP). GOTO, Ha-
jime [JP/JP]; Kabushiki Kaisha Honda Gijutsu Kenkyusho,
4-1, Chuo 1-chome Wako-shi, Saitama 351-0193 (JP).(74) Agents: BUCCA, Daniel et al.; McDermott, Will &
Emery, 600 13th Street, NW, Washington, DC 20005-3096
(US).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: PURIFICATION OF CARBON FILAMENTS AND THEIR USE IN STORING HYDROGEN

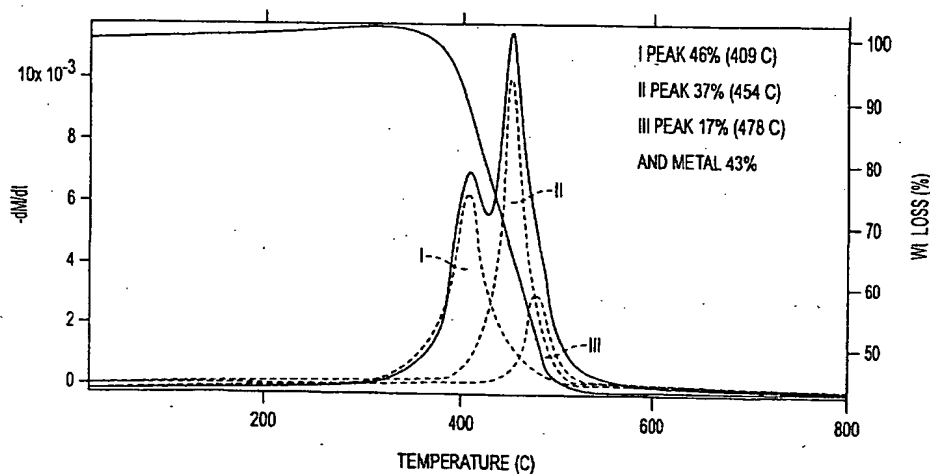

(57) Abstract: Carbon structures, e.g. carbon nano-fibers, suitable for absorbing hydrogen at low pressures and low temperatures are produced by a selective oxidation and/or acid reflux process. The process includes heating an impure mixture containing a crystalline form of carbon in the presence of an oxidizing gas at a temperature and time sufficient to selectively oxidize and remove a substantial amount of any amorphous carbon impurities from the mixture. Metal containing impurities can be removed from the mixture by exposing the desired carbon and accompanying impurities to an acid to produce a carbon fiber that is substantially free of both non-fiber carbon impurities and metal impurities. Another aspect of the present invention includes purified carbon structures that can store hydrogen at low pressures and temperatures.

WO 02/083556 A3



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

(88) Date of publication of the international search report:
18 December 2003

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Internat. application No.

P0005 02/11617

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 C01B31/02 D01F9/12 C01B3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, INSPEC, COMPENDEX, CHEM ABS Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	COLOMER J -F ET AL: "Different purification methods of carbon nanotubes produced by catalytic synthesis" INTERNATIONAL CONFERENCE ON SCIENCE AND TECHNOLOGY OF SYNTHETIC METALS, MONTPELLIER, FRANCE, 12-18 JULY 1998, vol. 103, no. 1-3, pages 2482-2483, XP002207419 Synthetic Metals, June 1999, Elsevier, Switzerland ISSN: 0379-6779 the whole document	1-6, 12-14
A	----- -/-	10,15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *S* document member of the same patent family

Date of the actual completion of the international search

30 September 2003

Date of mailing of the international search report

14 10. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Rigondaud, B

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/US 02/11617

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ZHANG Y ET AL: "Structure modification of single-wall carbon nanotubes" CARBON, ELSEVIER SCIENCE PUBLISHING, NEW YORK, NY, US, vol. 38, no. 15, 2000, pages 2055-2059, XP004217750 ISSN: 0008-6223 the whole document	1-6, 12-14
Y		
A		20, 22-26 10, 15, 35
Y	WO 96 09246 A (ISIS INNOVATION ; GREEN MALCOLM LESLIE HODDER (GB); TSANG SHIK CHI) 28 March 1996 (1996-03-28) claims 6, 7 page 3, line 33 -page 4, line 9	20, 22-26
A		35
X	DILLON A D ET AL: "A SIMPLE AND COMPLETE PURIFICATION OF SINGLE-WALLED CARBON NANOTUBEMATERIALS" ADVANCED MATERIALS, VCH VERLAGSGESELLSCHAFT, WEINHEIM, DE, vol. 11, no. 16, 10 November 1999 (1999-11-10), pages 1354-1358, XP000875153 ISSN: 0935-9648 the whole document	1, 2, 4, 29, 30, 33
A		2, 5, 6
X	EBBESEN ET AL.: "Purification of nanotubes" NATURE, vol. 367, no. 6463, 10 February 1994 (1994-02-10), page 519 XP002207406 the whole document	1, 3, 4
A		2, 5
X	DATABASE WPI Section Ch, Week 200158 Derwent Publications Ltd., London, GB; Class E36, AN 2001-528221 XP002207408 & KR 2001 027 422 A (CHO Y S), 6 April 2001 (2001-04-06) abstract	1, 3, 4
A		2, 5
X	US 5 641 466 A (EBBESEN THOMAS ET AL) 24 June 1997 (1997-06-24) claims 1-4 column 1, line 41 -column 2, line 46 example 1	1, 3, 4
A		2, 5
	-/--	

INTERNATIONAL SEARCH REPORT

 Internal Application No
 P 02/11617

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HAIYAN ZHANGA ET AL: "Electron spin resonance of carbon nanotubes prepared under two kinds of inert gas ambient" FULLERENES AND RELATED MATERIALS. SELECTED PAPERS PRESENTED AT SYMPOSIUM C OF THE IUMRS-ICAM'99, BEIJING, CHINA, 13-18 JUNE 1999, vol. 61, no. 7, pages 1123-1125, XP002207407 Journal of the Physics and Chemistry of Solids, July 2000, Elsevier, UK ISSN: 0022-3697 the whole document	1,3,4
A	---	2,5
X	YE Y ET AL: "HYDROGEN ADSORPTION AND COHESIVE ENERGY OF SINGLE-WALLED CARBON NANOTUBES" APPLIED PHYSICS LETTERS, AMERICAN INSTITUTE OF PHYSICS. NEW YORK, US, vol. 74, no. 16, 19 April 1999 (1999-04-19), pages 2307-2309, XP000829881 ISSN: 0003-6951 the whole document	17,18
A	---	19,27
X	DILLON A C ET AL: "STORAGE OF HYDROGEN IN SINGLE-WALLED CARBON NANOTUBES" NATURE, MACMILLAN JOURNALS LTD. LONDON, GB, vol. 386, 27 March 1997 (1997-03-27), pages 377-379, XP000783873 ISSN: 0028-0836 the whole document	17,18
A	---	19,27,34
X	KUZNETSOVA A ET AL: "Enhancement of adsorption inside of single-walled nanotubes: opening the entry ports" CHEMICAL PHYSICS LETTERS, 28 APRIL 2000, ELSEVIER, NETHERLANDS, vol. 321, no. 3-4, pages 292-296, XP002256163 ISSN: 0009-2614 the whole document	29-34

	-/--	

INTERNATIONAL SEARCH REPORT

Internat application No

PCT/US 02/11617

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>HERNADI K ET AL: "Reactivity of different kinds of carbon during oxidative purification of catalytically prepared carbon nanotubes"</p> <p>14TH INTERNATIONAL SYMPOSIUM ON THE REACTIVITY OF SOLIDS, BUDAPEST, HUNGARY, 27-31 AUG. 2000, vol. 141-142, pages 203-209, XP004248328</p> <p>Solid State Ionics, Diffusion & Reactions, May 2001, Elsevier, Netherlands</p> <p>ISSN: 0167-2738</p> <p>the whole document</p>	35
A	<p>US 5 698 175 A (EBBESEN THOMAS ET AL)</p> <p>16 December 1997 (1997-12-16)</p> <p>claims 3,4</p> <p>column 2, line 57 -column 3, line 29</p> <p>example 3</p>	20, 24-26, 29,30

INTERNATIONAL SEARCH REPORT

Inte application No.
US 02/11617

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-28, 35-37

Claims 1-28 and 35-37 relate to:

- a method for purifying a crystalline form of carbon, more particularly carbon fibers, carbon nanofibers and carbon nanotubes which contain underisable forms of carbon (such as amorphous carbon) and metal impurities. In an embodiment of the invention, carbon nanotubes having open ends can be synthesized by adding one more step to the purification process.
- the use of the purified crystalline carbon for storing hydrogen.
- a process for storing hydrogen using a single-wall carbon nanotube having opening ends.

2. Claims: 29-34

- Claims 29-34 relate to a process for producing a nano-structured carbon suitable for absorbing hydrogen at low pressures and low temperatures.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PC 02/11617

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9609246	A	28-03-1996	DE	69510552 D1	05-08-1999
			DE	69510552 T2	21-10-1999
			EP	0782543 A1	09-07-1997
			WO	9609246 A1	28-03-1996
			US	6090363 A	18-07-2000
KR 2001027422	A	06-04-2001	NONE		
US 5641466	A	24-06-1997	JP	2616699 B2	04-06-1997
			JP	7048110 A	21-02-1995
US 5698175	A	16-12-1997	JP	2595903 B2	02-04-1997
			JP	8012310 A	16-01-1996

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)